

# HARTMANN TRESORE

Security Solutions and Minibars for the Hotel Industry



**Room Safes**

**Minibars**


**Drop and Deposit Safes**

**Locker Units**

**Key Issuance Units / Key Cabinets**

**Back Office Safes**

**HARTMANN**



**TRESORE AG**

Paderborn • Berlin • Hamburg • Dusseldorf • Cologne • Paris • Milan • Warsaw • Winterthur • Dubai



*HARTMANN TRESORE AG is a company with a rich heritage. The company was founded as a blacksmiths and cartwright company more than two hundred years ago and went on to specialize in safes in 1983. HARTMANN TRESORE AG, in the meanwhile, has gone on to establish itself as one of the leading suppliers of safes of all kinds. It has sites in Europe and the Middle East.*


*As specialists for hotel and room safes, we have provided some of the top hotel chains in the world with more than 500,000 safes. Our product range includes room safes, minibars, drop and deposit safes, locker units, back office safes and key issuance units. Hoteliers are therefore able to obtain safes and minibars at an optimal price-performance ratio all from one single source: HARTMANN TRESORE.*

## Quality and Service

*More than 100,000 customers worldwide place confidence in our innovative ideas and expertise: a combination that can be trusted. There is no such thing as "no can do!" This motto has a tradition within the company. Alongside our standard range and by special request, we also offer individual solutions and special constructions as required by our customers.*

*We are your competent partners from the first noncommittal consultation – on site if desired – right up to the complete planning and execution phase. Short delivery times and a Europe-wide service complement our comprehensive service package. Our customer care service will be there to support you long after you have purchased with us.*

*We are there at your side – **for sure!***

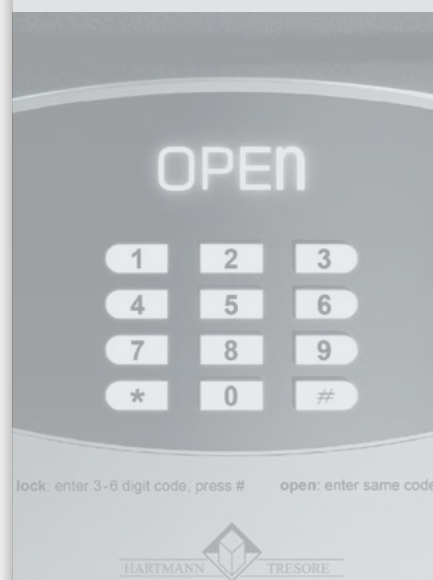



## Room Safes

pages 5 ff



Digital Laptop Safes Series HS 460	6-7
Digital Laptop Safes Series HS 470	8-9
Digital Safe Model HS 711-01	10
Digital Laptop Safe Model HS 709-02	11
Digital Laptop Safes Series HS 420	12
Digital Laptop Safe Model HS 910-02	13
Digital Laptop Safe Model HS SOLID	14
Top Open Safe Model HS TIARA II	15
UltiMax Service Unit for HS SOLID, TIARA II	15

## Minibars

pages 16 ff



Minibars Model HTM 30T-15, HTM 30TG-15	18
Minibars Model HTM 40T-15, HTM 40TG-15	19
Minibars Model HTM 30A-16, HTM 30AG-16	20
Minibars Model HTM 40A-16, HTM 40AG-16	21
Minibars Model HTM 30T-12, HTM 40T-12, HTM 60T-12	22-23
Minibars Model HTM 30A-11, HTM 40A-11	24
Minibar Model HTM 27A-17	25

## Drop and Deposit Safes

pages 26 ff



Drawer Safes Series SP	26
Security Compartment Modules for series SP	27
Drawer Safes Series HTDP	28
Drop Safes Series HS 510	29

## Locker Units

pages 30 ff

Sample Locker Units with stainless steel finish	30
Sample Locker Units with lacquered steel finish	32
Locker Unit WTS 060-01	32

## Key Issuance Units/ Key Cabinets

pages 33 ff



Key Issuance Unit Model HTS 315-01	33
Key Cabinets Series HTS 105	34
Key Cabinets Series HTS 107	34
Key Safes Series HTS 114	35
Key Safes Series HTS 120	35

## Back Office Safes

pages 36 ff



Burglar-proof Safes Series F 104	36
Burglar-proof Safes Series HPI 1000	37
Data Media Safes Series HTFA 080	38
Data Media Safes Series HTFI 190	38







## Security and Comfort for the Guest

*Offer your guests more security and comfort with room safes and minibars!*

**HARTMANN room safes** fulfil all the requirements that need to be considered when selecting a room safe: they are operated intuitively, so your guests will not require instruction before using them. In addition, the safes require no maintenance by hotel staff apart from when the batteries are changed.

New in our product portfolio: the Series HS 460 and HS 470 design room safes (pp. 6-9). The silver control panel and silver design elements lend the safe a modern, understated look. The design display has easy-to-read white LEDs and individually backlit keys, so the safe can be operated comfortably even in unfavourable light.

**HARTMANN minibars** are available with various cooling systems. The minibars with Peltier cooling and absorption cooling operate completely without noise and have an impressively low energy consumption. The modern minibars with Peltier cooling have **energy efficiency class A+**, which is currently the best classification available on the minibar market.

The new design line complements the existing minibar range perfectly. The new room safes harmonise superbly with the new minibars, which also have a black and silver colour scheme. The minibars from this new line are available with Peltier and absorption cooling.

## HARTMANN Room Safes

**HARTMANN room safes** are available in many sizes and with a large variety of features and fittings, and can be supplied with various locking systems suited to any type of business – from a classic room safe for cupboard or cabinet installation to a top-opening safe for spacesaving installation in a drawer. All models are easy to use, reliable and noiseless in operation.







**NEW:**  
Design-Display  
with white  
LED lights

## Digital Laptop Safes Series HS 460

The HARTMANN Digital Laptop Safes combine cutting-edge security with modern design and easy handling. With iButton for readouts of all operations.

### ■ Construction

- Corpus 2 mm thick
- Solid door leaf, 5 mm thick

### ■ Configuration/Functionalities

- Electronic keypad lock with freely selectable 3- to 6-digit code
- Buttons each with particularly bright LED lighting
- Easy-to-read LED display in white
- Silver-coloured control panel, optional also available in orange\*
- Motor-driven opening and closing via 2 x 20 mm solid locking bolts
- Freely selectable hotel-only master code
- Emergency opening using the emergency key included in delivery (master key)
- Storage and readout of the last 100 operations using the iButton
- Operation with commercially available alkaline batteries (AA, 4 x 1.5V), included in the delivery
- Battery status indicator
- Ready for wall or floor mounting
- LED interior lighting
- Padded flooring in the safe
- DIN right-hinged door



Laptop Safe 15,6"

Digital Laptop Safe HS 460-01

\* for quantities over 50 pieces



Super Laptop Safe 17"



Digital Laptop Safe HS 460-02

- **Functions of iB-key**
  - Readout of operations, audit function
  - Emergency opening
  - Programming date and time
  - Programming master keys

- **Finish**
  - Anthracite (powder coated)

- **Options**
  - DIN left-hinged door
  - Reader unit incl. software
  - Control panel available in orange\*

Comfortable  
programming via  
**i-Button**



iButton by Maxim Integrated, USA



Digital Laptop Safe HS 460-01



Digital Laptop Safe HS 460-02



Control panel also available in orange

**Digital Laptop Safes**  
Series HS 460

	Exterior dimensions h x w x d* in mm	Weight in kg
HS 460-01 <i>Digital Laptop Safe</i>	190 x 360 x 460	13
HS 460-02 <i>Digital Laptop Safe</i>	190 x 450 x 495	16

\* All depth data refer to safe corpus only.  
For overall depth including control panel, add 20 mm to this value.



With LED interior lightning



**NEW:**  
Design-Display  
with white  
LED lights

## Digital Laptop Safes Series HS 470

The HARTMANN Digital Laptop Safes combine cutting-edge security with modern design and easy handling. The matt finish and the silver-coloured lines lend the safe a look that is both sophisticated and stylish.

### ■ Construction

- Corpus 2 mm thick
- Solid door leaf, 5 mm thick

### ■ Configuration/Functionalities

- Electronic keypad lock with freely selectable 3- to 6-digit code
- Buttons each with particularly bright LED lighting
- Easy-to-read LED display in white
- Storage of the last 100 operations
- Silver-coloured control panel
- Motor-driven opening and closing via 2 x 20 mm solid locking bolts
- Freely selectable hotel-only master code
- Emergency opening using the emergency key included in delivery (master key)
- Operation with commercially available alkaline batteries (AA, 4 x 1.5V), included in the delivery
- Battery status indicator
- Ready for wall or floor mounting
- LED interior lighting
- Padded flooring in the safe
- DIN right-hinged door or DIN left-hinged door



Laptop Safe 15,6"

Digital Laptop Safe HS 470-01





Super Laptop Safe 17"

- **Finish**
  - Anthracite (powder coated)
- **Options**
  - DIN left-hinged door
  - Reader unit incl. software



Digital Laptop Safe HS 470-02

Large Design  
Room Safes  
for suites



Digital Laptop Safe HS 470-02



Digital Safe HS 470/S5



Digital Safe HS 470/S8

**Digital Laptop Safes**  
Series HS 470

	Exterior dimensions h x w x d* in mm	Weight in kg
HS 470-01 Digital Laptop Safe	190 x 360 x 460	13
HS 470-02 Digital Laptop Safe	190 x 450 x 495	16
HS 470/S5**	536 x 355 x 464	30
HS 470/S8 (with 2 shelves)	800 x 500 x 464	45

\* All depth data refer to safe corpus only.

For overall depth including control panel, add 10 mm to this value.

\*\* Delivery time on request



with LED-interior lighting


**Digital Safe Model HS 711-01**

*Small, compact and inexpensive – the ideal starter model.*

**Construction**

- Corpus 2 mm thick
- Solid door leaf, 6 mm thick

**Configuration/Functionalities**

- Electronic key-pad lock with freely selectable 4-digit code
- Easy-to-read LED display
- Motor-driven opening and closing via 2 x 20 mm solid locking pins
- Freely selectable hotel-only master code
- Emergency opening using the emergency key (master key)
- Operation with commercially available alkaline batteries (4 x 1.5 V), included in the delivery
- Battery status indicator
- Padded flooring in the safe
- Ready for wall or floor mounting
- Mounting materials included in the delivery
- DIN right-hinged door
- Trilingual operating instructions (German, English, French) included as a sticker with a wipe-clean surface

**Options**

- DIN left-hinged door



- Well-readable LED display
- Electromechanical locking system

**Digital Safe HS 711-01**

**optimal  
for clinics  
and care  
facilities**

**Digital Safe**  
*Model HS 711-01*

**Exterior dimensions**  
h x w x d\* in mm

**Weight**  
in kg

**HS 711-01**

**180 x 280 x 200**

**10**

\* All depth data refer to safe corpus only.

For overall depth including control panel, add 10 mm to this value.



Digital-Laptopsafe HS 709-02



**Digital Laptop Safe Model HS 709-02**  
Suitable for 15-inch notebooks

■ **Construction**

- Corpus 2 mm thick
- Solid door leaf, 5 mm thick

■ **Configuration/Functionalities**

- Electronic key-pad lock with freely selectable 4-digit code
- Easy-to-read LED display
- Motor-driven opening and closing via 2 x 20 mm solid locking pins
- Freely selectable hotel-only master code
- Emergency opening using the emergency key (*master key*)
- Operation with commercially available alkaline batteries (4 x 1.5 V), included in the delivery
- Battery status indicator
- Colour: white
- Padded flooring in the safe
- Ready for wall or floor mounting
- Mounting materials included in the delivery
- DIN right-hinged door
- Trilingual operating instructions (German, English, French) included as a sticker with a wipe-clean surface

■ **Options**

- DIN left-hinged door

**Digital Laptop Safe**  
*Model HS 709-02*

**Exterior dimensions**  
h x w x d\* in mm

**Weight**  
in kg

**HS 709-02 Laptopsafe**

230 x 420 x 380

16

\* All depth data refer to safe corpus only.

For overall depth including control panel, add 10 mm to this value.

**optimal  
for clinics  
and care  
facilities**




**Digital Laptop Safes Series HS 420**
**Construction**

- Corpus 2 mm thick
- Solid door leaf, 5 mm thick

**Configuration/Functionalities**

- Electronic key-pad lock with freely selectable 3-6-digits code
- Easy-to-read LED display
- Storage of the last 100 operation entries of the safe
- Motor-driven opening and closing via 2 x 20 mm solid locking bolts
- Freely selectable hotel-only master code
- Emergency opening using the emergency key (master key)
- Operation with commercially available alkaline batteries (AA, 4 x 1.5V), included in the delivery
- Battery status indicator
- Padded flooring in the safe
- Ready for wall or floor mounting
- Mounting materials included in the delivery
- Colour: "dark grey" (powder coated)
- DIN right-hinged door
- Trilingual operating instructions (German, English, French) included as a sticker with a wipe-clean surface

**Options**

- DIN left-hinged door
- Reader unit incl. software




Suitable for the new generation of iPads


**Digital Safe HS 420-01**

**Laptop Safe 15"**

**Digital Laptop Safe HS 420-02**


interior floor is padded



modern design



well-readable display



bolt locking system

**Laptop Safes  
Series HS 420**
**HS 420-01 Digital Safe**
**Exterior dimensions**  
h x w x d\* in mm

200 x 350 x 270

**Weight**  
in kg

10

**HS 420-02 Laptop Safe**

200 x 420 x 370

12

\* All depth data refer to safe corpus only.

For overall depth including control panel, add 10 mm to this value.



Easy-to-use keypad lock

Standard with  
LED interior lighting  
and socket for  
charging Laptops etc.



Laptop Safe 15"

Digital Laptop Safe HS 910-02



with LED interior lighting



optional with IB-key code system



with 230 V-socket

### Digital Laptop Safe Model HS 910-02

Innovative management system thanks to the iB key code system. On request with iB-keys, that can be used for programming, data reading and as a master key.

#### Construction

- Corpus 1.5 mm thick
- Solid door leaf, 5 mm thick

#### Configuration/Functionalities

- Electronic key-pad lock with freely selectable 4 to 9-digit code
- Easy-to-read LED display
- Key pad with blue backlight
- LED interior lighting
- 230 V socket that is covered upon delivery for optimal use
- Operation with commercially available alkaline batteries (4 x 1.5 V) *not included in the delivery*
- Battery status display
- Patented sliding closure covers the mechanical emergency lock and the external power supply point
- Padded interior
- Ready for wall or floor mounting
- Mounting materials included in the delivery
- Colour: "dark grey" (powder coated)
- DIN right-hinged door
- Trilingual operating instructions (German, English, French) included as a sticker with a wipe-clean surface
- Motor-driven opening and closing via 2 x 20 mm solid locking pins
- Door opens using the electronic key (iButton key) or after entry of the correct code
- Emergency opening possible with an external 9 V battery
- Door with coil spring — the door will be open for the arrival of the next guest

#### Options

- DIN left-hinged door
- Reader unit incl. software
- Emergency opening possible using the iB key (*master key*)
- Comfortable management using the iB key code system — the iB keys can be used as a master key for an emergency opening, used for programming purposes and used to read data
- Audit function: documentation of the last 300 opening and closing operations

### Digital Laptop Safe Model HS 910-02

#### HS 910-02 Digital Laptop Safe

Exterior dimensions  
h x w x d\* in mm

220 x 430 x 350

Weight  
in kg

12

\* All depth data refer to safe corpus only.

For overall depth including control panel, add 20 mm to this value.



## Room Safes Safeplace by HARTMANN

Room safes from the "Safeplace by HARTMANN" series combine cutting-edge security technology with a particularly impressive exterior design. The products HS SOLID SL and HS TIARA II offer easy, convenient handling – for guests and hotel staff alike.



Laptop Safe 15"

**Safeplace**  
by HARTMANN

Laptop Safe HS SOLID Laptop SL

### Digital Laptop Safe Model HS SOLID SL

The room safe HS SOLID SL offers innovative design and cutting-edge security features.

#### ■ Construction

- Corpus wall 2 mm thick
- Solid door leaf 5 mm thick

#### ■ Configuration/Functionalities

- Electronic keypad lock with 4-digit user-selected code
- Keypad with backlight
- Storage and readout of last 500 operations
- Easy-to-read red LED display

- Battery status indicator
- Padded flooring inside
- "Sleep mode" after wrong code has been entered five times
- Infrared communication with UltiMax Service Unit or optional SparKey (see beside)
- Choice of DIN right-hinge or DIN left-hinge door
- Colour: black or light grey



#### Laptop Safes Model HS SOLID SL

Exterior dimensions  
h x w x d\* in mm

Weight  
in kg

HS SOLID Laptop SL

194 x 357 x 437

11

\* All depth data refer to safe corpus only.

For overall depth including control panel, add 20 mm to this value.



Delivery time for light grey on request



# Safeplace

by HARTMANN



Laptop Safe 15"

Top Open Safe Model HS TIARA II



## Top Open Safe Model HS TIARA II

The elegant, easy-to-operate Top Open Safe HS TIARA II can be integrated in almost any drawer to save space.

### Construction

- Corpus walls 2 mm thick
- Solid door leaf 2 mm thick

### Configuration/Functionalities

- Electronic keypad lock with 4-digit user-selected code
- Large, easy-to-read red LED display
- Keypad with yellow backlight
- Visual indicator for every operation
- Storage and readout of last 500 operations
- Battery status indicator
- Padded flooring inside
- "Sleep mode" after wrong code has been entered five times
- Infrared communication with UltiMax Service Unit or optional with SparKey (see beside)
- Hydraulic arm for easy opening
- Colour: black

Top Open Safe Model HS TIARA II	Exterior dimensions h x w x d in mm	Weight in kg
HS TIARA II	136 x 400 x 350	12

## UltiMax Service Unit

The wireless remote-control service and programming unit for the models HS Solid and HS Tiara II interacts with safes via an infrared interface. The PDA handheld device comes with many features that allow rapid and secure initialisation and administration of the safes by hotel staff.

Ensuring security at the highest level!

## SparKey

The SparKey is a service unit for smaller hotels – a cost-effective solution for programming, data readout and emergency opening of the safes!



UltiMax Service Unit



SparKey



## HARTMANN Minibars – energy efficient, silent and comfortable

*Your guests will appreciate the added convenience of having a minibar in the room! Minibars allow guests to enjoy cold drinks and snacks at any time of day or night without even having to leave the comfort of their hotel room.*

HARTMANN minibars are available with absorption cooling and with Peltier cooling. The compressor cooling is less suitable for minibars because this technology is comparatively louder in operation and susceptible to more maintenance work.

### HARTMANN minibars with absorption cooling

The absorption minibars are cooled with a mixture of gas and water that liquefies in a condenser. An evaporator turns it back into gas. The cooling takes place at this part of the cycle.

HARTMANN minibars with absorption cooling are absolutely silent and vibration free.

### Minibars with Peltier cooling – optimal comfort with optimum energy utilization

Most of the minibars supplied by HARTMANN TRESORE are fitted with thermo-electric cooling systems. In simple terms, these systems use electricity for cooling.

This direct conversion of electricity into cooling energy not only makes Peltier minibars particularly energy-efficient, but also offers hoteliers and their guests numerous other benefits:

- **Very low energy consumption**

*Peltier minibars are real energy savers.*

*The 30-litre models stand out due to energy efficiency class A+, which is the best achievable classification for minibars.*

- **Completely silent running**

*HARTMANN Peltier minibars have no moving parts e.g. fans, so they operate completely without noise or vibration.*

- **No maintenance required**

*Minibars with Peltier cooling have no moving parts, so they are wear-free, durable and require absolutely no maintenance!*

- **Environment-friendly**

*Peltier minibars are particularly eco-friendly: they require no ammonia.*

- **More room for contents**

*As Peltier minibars do not need a compressor, there is more space inside for drinks and snacks.*

- **Never needs defrosting**

*A modern fuzzy logic system regulates the temperature in Peltier minibars automatically. So they are guaranteed never to require defrosting.*



### Wide range of possible applications


*There is such a wide range of HARTMANN minibars that they are suitable for all categories of the hotel industry, they are perfect for hospitals, care homes and student hostels.*

## HARTMANN Minibars – Cooling Air Intake and Discharge


When installing a minibar, it is important to allow ample space for fresh air intake and exhaust air discharge, so that the minibar can deliver its full cooling capacity while consuming as little energy as possible at the same time.

The inside of the minibar is cooled by expelling heat via the back of the unit, so the air surrounding the minibar must be able to circulate freely. For this reason, it is important to allow a ventilation cross-section of 200 cm<sup>2</sup> for air intake and discharge when installing the safe. The distance between the back of the minibar and the piece of furniture it is installed in should be at least 2 cm. As a general rule: the more space a minibar has to expel exhaust air, the more efficiently it will operate and the more energy-efficient it will be.

The air intake for the minibar is located at the bottom, with fresh air entering either at the front or at the back as shown in the schematic drawings:

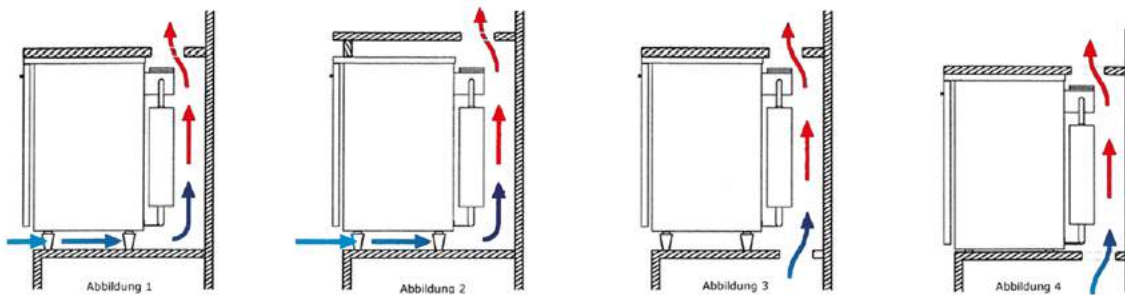

Warm (exhaust) air must be discharged at the top of the safe in all cases (chimney effect), as shown in the installation example:

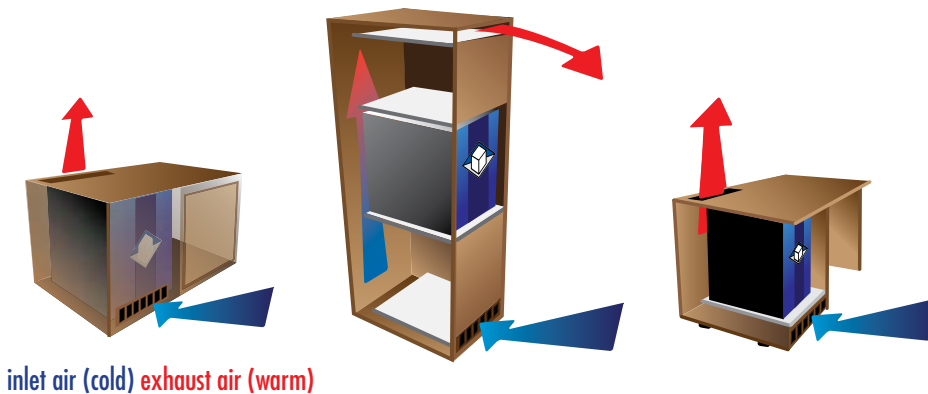

inlet air (cold) exhaust air (warm)

Minibars should not be set up close to radiators or other heat sources, or placed in direct sunlight, as this can lead to higher energy consumption.

We will be happy to assist you with any questions you may have about installation of your minibar!

### Power Consumption Per Minibar Per Year

HTM 30T-15

96 kWh p. A.

Comparable absorber minibar,  
consumption of 237 kWh p.a.

237 kWh p. A.

**Annual energy savings of approx. 60 %!**





## 30 litres - class

### Minibar Model HTM 30T-15/ HTM 30TG-15

The design minibar with absolute low power consumption - only 96 kWh p. A.! 100% silent and vibration-free in operation!

#### ■ Configuration/Functionalities

- Non-wearing Peltier thermoelectrics
- Electronic adjustable thermostat
- No moving parts – 100% silent and vibration free
- Ammonia-free and therefore environmentally friendly
- Two transparent, height-adjustable and removable plastic shelves
- Two adjustable drinks holder in the door for different sizes of bottles (Model HTM 30T-15)
- LED interior light
- DIN right-hinged door, changeable to DIN left
- With sliding hinge to mount the minibar door to the door of a built-in cabinet (Model HTM 30T-15)
- Colours: corpus in black; interior in white
- Door with a silver frame
- Furnishing elements in ice blue

## Peltier Cooling


Energy efficiency class A+  
Very low energy consumption - only 96 kWh/p.A.!



Minibar HTM 30T-15



with Peltier technology



LED interior light



height-adjustable shelves

with fuzzy logic control system

Model	Exterior dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (net)	Performance in watt	Voltage volts	Energy consumption		Energy efficiency class according to EN 1060/2010	Number of shelves
						kWh/p.D.*	kWh/p.A.*		
HTM 30T-15	511 x 441 x 424	12	28	60	100-230	0,26	96	A+	2
HTM 30TG-15 (with glass door)	511 x 441 x 424	14,5	34	60	100-230	0,62	227	C	2

\*kWh/p.D. = Consumption per day, kWh/p.A. = Consumption per year



## Peltier Cooling



Minibar HTM 40T-15

Energy efficiency  
class A+  
Very low energy  
consumption -  
only 104 kWh/p.A.!

## 40 litres - class

**Minibar Model HTM 40T-15 / HTM 40TG-15**  
40-litre volume minibar with Peltier cooling system-  
energy-saving and completely silent in operation

### Configuration/Functionalities

- Non-wearing Peltier thermoelectrics
- Electronic adjustable thermostat
- No moving parts – 100% silent and vibration free
- Ammonia-free and therefore environmentally friendly
- Two transparent, height-adjustable and removable plastic shelves
- Two adjustable drinks holder in the door for different sizes of bottles and beverage cans, even for 1l and 1.5l bottles (Model HTM 40T-15)
- LED interior light
- DIN right-hinged door, changeable to DIN left
- With sliding hinge to mount the minibar door to the door of a built-in cabinet (Model HTM 40T-15)
- Colours: corpus in black; interior in white
- Door with a silver frame
- Furnishing elements in ice blue


with glass door  
for sales  
promotional  
presentation



Minibar HTM 40TG-15



with Peltier  
technology



LED interior light



height-adjustable shelves

with fuzzy logic  
control system



Model	Ext. dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (net)	Performance in watt	Voltage volts	Energy consumption		Energy efficiency class according to EN 1060/2010	Number of shelves
						kWh/p.D.*	kWh/p.A.*		
HTM 40T-15	566 x 441 x 429	12	33	60	100-240	0,28	104	A+	2
HTM 40TG-15 (with glass door)	566 x 441 x 434	15	40	60	100-240	0,70	254	D	2

\*kWh/p.D. = Consumption per day, kWh/p.A. = Consumption per year



**30 litres - class****Absorption Cooling**

**Minibar Model HTM 30A-16 / HTM 30AG-16**  
30-litre minibar with modern absorption cooling system – noiseless and vibration-free. Flexible configuration with adjustable shelves and bottle compartments in the door.

#### ■ Configuration/Functionalities

- Adjustable thermostat
- 2 height-adjustable and removable plastic shelves
- Model HTM 30A-16: 2 adjustable drinks holder in the door with a gadget for a 1l-bottle
- LED interior light
- DIN right-hinged door, changeable to DIN left
- Flat door with a silver frame
- With sliding hinge to mount the minibar door to the door of a built-in cabinet
- Colours: corpus in black; interior in white
- Furnishing elements in ice blue



Minibar HTM 30A-16



with absorption  
technology



height-adjustable shelves



door drinks holder



1 l-drinks holder

Model	Exterior dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (net)	Performance in watt	Voltage volts	Energy consumption		Energy efficiency class according to EN 1060/2010	Number of shelves
						kWh/p.D.*	kWh/p.A.*		
<b>HTM 30A-16</b>	511 x 441 x 457	13	28	60	230	0,67	245	D	2
<b>HTM 30AG-16</b> (with glass door)	511 x 441 x 457	15,5	34	75	230	1,0	372	F	2

\*kWh/p.D. = Consumption per day, kWh/p.A. = Consumption per year



## Absorption Cooling

40 litres - class

**Minibar Model HTM 40A-16 / HTM 40AG-16**  
40-litre minibar with modern absorption cooling system — noiseless and vibration-free. Flexible configuration with adjustable shelves and bottle compartments in door.

#### ■ Configuration/Functionalities

- Adjustable thermostat
- 2 height-adjustable and removable plastic shelves
- Model HTM 40A-16: 2 adjustable drinks holder in the door, model with a gadget for a 1.5l bottle
- LED interior light
- DIN right-hinged door, changeable to DIN left
- Flat door with a silver frame
- With sliding hinge to mount the minibar door to the door of a built-in cabinet
- Colours: corpus in black; interior in white
- Furnishing elements in ice blue



Minibar HTM 40A-16

with absorption  
technology



height-adjustable shelves



door drinks holder



1.5 l-drinks holder



Model	Ext. dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (net)	Performance in watt	Voltage volts	Energy consumption		Energy efficiency class according to EN 1060/2010	Number of shelves
						kWh/p.D.*	kWh/p.A.*		
HTM 40A-16	566 x 441 x 457	14	33	60	230	0,73	266	D	2
HTM 40AG-16 (with glass door)	566 x 441 x 457	16,5	40	75	230	1,0	372	F	2

\*kWh/p.D. = Consumption per day, kWh/p.A. = Consumption per year



### 30 litres - class

**Minibar Model HTM 30T-12/ HTM 30TG-12**  
30-litres minibar with peltier cooling - very low power consumption and absolute silent and vibration-free in operation!

#### ■ Configuration/Functionalities

- Non-wearing Peltier thermoelectrics
- Electronic adjustable thermostat
- No moving parts – 100% silent and vibration free
- Ammonia-free and therefore environmentally friendly
- Two transparent, height-adjustable and removable plastic shelves
- Two adjustable drinks holder in the door for different sizes of bottles (Model HTM 30T-12)
- LED interior light
- DIN right-hinged door, changeable to DIN left
- With sliding hinge to mount the minibar door to the door of a built-in cabinet (Model HTM 30T-12)
- Colours: corpus in black; interior in white



### Peltier Cooling



with glass door  
for sales  
promotional  
presentation

Minibar HTM 30TG-12



Energy efficiency  
class A+  
Very low energy  
consumption -  
only 96 kWh/p.A.!

with  
additional front  
that can be  
filled

Minibar HTM 30T-12

with Peltier  
technology



LED interior light



height-adjustable shelves

with fuzzy logic  
control system

Model	Exterior dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (net)	Performance in watt	Voltage volts	Energy consumption		Energy efficiency class according to EN 1060/2010	Number of shelves
						kWh/p.D.*	kWh/p.A.*		
HTM 30T-12	512 x 419 x 397	12	26	60	100-240	0,26	96	A+	2
HTM 30TG-12 (with glass door)	512 x 419 x 397	13	26	60	100-240	0,47	173	C	2

\*kWh/p.D. = Consumption per day, kWh/p.A. = Consumption per year



**Peltier Cooling**

Energy efficiency  
class A+  
Very low energy  
consumption -  
only 104 kWh/p.A.!



Minibar HTM 40T-12



Minibar HTM 40TG-12



Minibar HTM 60T-12

with two  
removable  
drinks holder in  
the door


with Peltier  
technology



LED interior light



height-adjustable shelves




optional with lock

**40/60 litres - class****Minibar**

Model HTM 40T-12 / HTM 40TG-12 / HTM 60T-12  
40-litres/60-litres minibar with Peltier cooling system  
– energy-saving and completely silent in operation!

**Configuration/Functionalities**

- Non-wearing Peltier thermoelectrics
- Electronic adjustable thermostat
- No moving parts – 100% silent and vibration free
- Ammonia-free and therefore environmentally friendly
- Two transparent, height-adjustable and removable plastic shelves
- Two adjustable drinks holder in the door for different sizes of bottles and beverage cans, even for 1l and 1.5l bottles (Model HTM 40T-12/HTM 60T-12)
- LED interior light
- DIN right-hinged door, changeable to DIN left
- With sliding hinge to mount the minibar door to the door of a built-in cabinet (Model HTM 40T-12/HTM 60T-12)
- Colours: corpus in black; interior in white

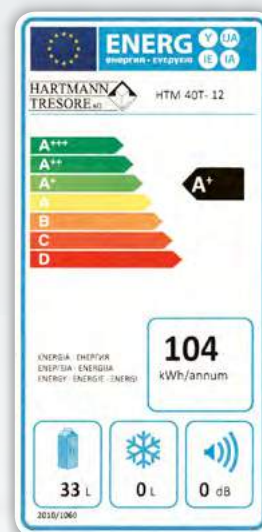

Modell	Ext. dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (net)	Performance in watt	Voltage volts	Energy consumption		Energy efficiency class according to EN 1060/2010	Number of shelves
						kWh/p.D.*	kWh/p.A.*		
HTM 40T-12	566 x 441 x 432	14	33	60	100-240	0,28	104	A+	2
HTM 40TG-12 (with glass door)	566 x 441 x 432	15	33	60	100-240	0,61	224	C	2
HTM 60T-12	566 x 477 x 522	16	48	60	100-240	0,55	200	C	2

\*kWh/p.D. = Consumption per day, kWh/p.A. = Consumption per year



**30/40 litres - class****Absorption Cooling**

**Minibar Model HTM 30A-11 / HTM 40A-11**  
30-litre respectively 40-litre minibar with modern absorption cooling system – noiseless and vibration-free. Flexible configuration with adjustable shelves and bottle compartments in door.

#### ■ Configuration/Functionalities

- Adjustable thermostat
- 2 height-adjustable and removable plastic shelves
- 2 adjustable drinks holder in the door, model HTM 40A-11 with a gadget for a 1.5l-bottle
- DIN right-hinged door, changeable to DIN left
- Flat door
- With sliding hinge to mount the minibar door to the door of a built-in cabinet
- Colours: corpus in black; interior in white



Minibar HTM 30A-11



Minibar HTM 40A-11

with absorption  
technology



temperature regulator



height-adjustable shelves



door drinks holder



1.5 l-drinks holder

Model	Exterior dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (net)	Performance in watt	Voltage volts	Energy consumption		Energy efficiency class according to EN 1060/2010	Number of shelves
						kWh/p.D.*	kWh/p.A.*		
HTM 30A-11	512 x 419 x 423	12	26	60	220-240	0,80	293	E	2
HTM 40A-11	566 x 441 x 457	14	34	60	220-240	0,76	278	E	2

\*kWh/p.D. = Consumption per day, kWh/p.A. = Consumption per year

## Absorption Cooling

27 litres - class



Minibar HTM 27A-17

**Minibar Model HTM 27A-17**

Compact and lightweight 27-litre volume minibar – also suitable for installation in smaller rooms.

■ **Configuration/Functionalities**

- Fully automatic defroster and easy-to-use refrigeration regulator
- DIN right-hinged door, changeable to DIN left
- With sliding hinge to mount the minibar door to the door of a built-in cabinet
- Two adjustable drinks holder in the door for different sizes of bottles and beverage cans
- Two height-adjustable and removable shelves
- LED interior light
- Door opening angle of 180°
- Colours: corpus in black; interior in white
- All-round magnet door seals to ensure optimum closure

with absorption  
technology



door drinks holder



height-adjustable shelves

with fuzzy logic  
control system

Model	Exterior dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (net)	Performance in watt	Voltage volts	Energy consumption		Energy efficiency class according to EN 1060/2010	Number of shelves
						kWh/p.D.*	kWh/p.A.*		
HTM 27A-17	512 x 390 x 423	12	21	60	220-240	0,72	263	D	2

\*kWh/p.D. = Consumption per day, kWh/p.A. = Consumption per year



## HARTMANN *Drop and Deposit Safes*

*Drop and deposit safes are the ideal solution to quickly and securely store larger sums of cash even during day-to-day business operations, for example in a restaurant, in a bar or at a reception desk. Employees can drop their waiter wallets or moneybags into the safe via a drawer or flap, which means that the safe does not have to be opened. The dropped contents remain non-returnable until authorized personnel, for example the business owner or account manager removes the contents.*

### **Drawer Safes Series SP**

*HARTMANN drawer safes from the SP series are ideal as an add-on solution when securing larger amounts of cash in an uncomplicated and quick way.*

#### ■ **Construction**

- In line with security level B burglar protection according to VDMA 24992 05/95
- All-round double-walled corpus
- Door leaf 6 mm
- Double-walled door 80 mm
- Door and corpus filled with high-quality fire-proof insulation according to DIN 4102
- All-round fire fold
- Fixture for floor and wall anchorage (SP 700)
- Retraction block that stops removal of the dropped contents via the drawer

#### ■ **Configuration/Functionalities**

- The especially smooth-running drawer construction runs on maintenance-free telescopic runners. The contents to be dropped fall into the drop tray as soon as the drawer is fully closed. The drop tray is standard for all models from SP 1020 upwards
- Compartment shelves
- (1 or 2, according to safe size)
- DIN right-hinged door
- Lacquered finish RAL 7035 light grey

#### ■ **Lock**

- Main door and drawer with double-bit security lock (includes 2 keys)

#### ■ **Options**

- Electronic lock (also for the drawer)
- 2 mechanical double-bit security lock (4-eyes principle)
- Deposit drawer at the back of the safe
- Protruding deposit drawer
- Comes specially equipped if desired

ideal as an  
under-the-counter  
safe



**Drawer Safe SP 765**

- Drop tray 300 mm high
- With retraction block



**Drawer Safe SP 1220**

- Drop tray 300 mm high
- Individual interior set up
- Special lacquered finish



**Drawer Safe SP 1420**

Image with options

Drawer Safes Series SP	Exterior dimensions h x w x d** in mm	Interior dimensions h x w x d in mm	Collection tray height in mm	Weight in kg
<b>SP 700</b>	700 x 640 x 560	330 x 475 x 360	-	300
<b>SP 1020</b>	1020 x 640 x 560	650* x 475 x 360	300	300
<b>SP 1220</b>	1220 x 640 x 610	850* x 475 x 410	300	345
<b>SP 1420</b>	1420 x 640 x 610	1050* x 475 x 410	300	365

\* Height includes a drop tray height of 300 mm \*\*Exterior depth including fitting





Special sizes available!



Example depiction:  
Drawer Safe SP 700  
with security compartment module



## Security Compartment Modules for SP Series

The drawer safes of the SP series can be supplemented by adding one or more security compartment modules. The number, height and lock system type of the individual compartments can be selected individually. You are free to customize your security compartments to suit your requirements, for example, to store cash register drawers, waiter wallets, cash strongboxes or safe bags – you can put your combination safe together according to your individual needs.

Freely selectable number and size of compartments

With different compartments e.g. for the day's takings of different shifts



SP 700 with  
backside drawer  
opening



Option: Security compartment with insert cassette



Detailed picture of the drop drawer


**Drawer Safes Series HTDP**

Available in three different resistance grades for the safekeeping of valuable items.

**Construction HTDPI**
**Resistance grade D-I according to EN 1143-2**

- Door strength 104 mm
- All-round multi-walled corpus
- Armoured multi-walled drawer
- Drawer (200 mm) on smooth-running telescopic runners with retraction block

**Construction HTDP II**
**Resistance grade D-II according to EN 1143-2**

- Multi-walled door strength 110 mm
- All-round multi-walled corpus with special high-strength concrete filling
- Multi-walled armoured drawer
- Drawer (200 mm) on smooth-running telescopic runners with retraction block
- Emergency locking system (activation in the event of an attempted burglary)

**Construction HTDP III**
**Resistance grade D-III according to EN 1143-2**

- Multi-walled door strength 130 mm
- All-round multi-walled corpus with special high-strength concrete filling
- Multi-walled armoured drawer
- Drawer (200 mm) on smooth-running telescopic runners with retraction block
- Drawer front filled with special concrete
- Emergency locking system (activation in the event of an attempted burglary)
- Set up for installation of burglar alarm components in line with a connection to existing burglar alarm system

**Basic Configuration**

- DIN right-hinged door
- Lacquered finish RAL 7035 light grey

**Lock**

- Double bit security lock on the door and on the drawer

**Option**

- Electronic lock
- 2 mechanical double-bit security lock (4-eyes principle)



Image: with options

Drawer Safe HTDP II 1

Drawer Safes Series HTDPI	Exterior dimensions h x w x d in mm	Interior dimensions h x w x d in mm	Weight in kg	Volume in litres
HTDPI 1	800 x 650 x 550	530 x 520 x 370	300	102
HTDPI 2	1000 x 650 x 550	730 x 520 x 370	300	140
HTDPI 3	1200 x 650 x 550	930 x 520 x 370	300	179
HTDPI 4	1400 x 650 x 550	1130 x 520 x 370	300	217
Drawer Safes Series HTDP II	Exterior dimensions h x w x d in mm	Interior dimensions h x w x d in mm	Weight in kg	Volume in litres
HTDP II 1	800 x 650 x 550	530 x 520 x 370	385	102
HTDP II 2	1000 x 650 x 550	730 x 520 x 370	470	140
HTDP II 3	1200 x 650 x 550	930 x 520 x 370	560	179
HTDP II 4	1400 x 650 x 550	1130 x 520 x 370	630	217
Drawer Safes Series HTDP III	Exterior dimensions h x w x d in mm	Interior dimensions h x w x d in mm	Weight in kg	Volume in litres
HTDP III 1	800 x 650 x 550	500 x 500 x 330	470	83
HTDP III 2	1000 x 650 x 550	700 x 500 x 330	565	116
HTDP III 3	1200 x 650 x 550	900 x 500 x 330	675	149
HTDP III 4	1400 x 650 x 550	1100 x 500 x 330	770	182



Drop Safe HS 510-04

Drop Safes Series HS 510	Exterior dimensions h x w x d in mm	Interior dimensions h x w x d in mm	Weight in kg	Volume in litres
HS 510-03	600 x 250 x 250	400 x 240 x 210	20	19
HS 510-04	600 x 460 x 460	400 x 450 x 420	55	74



Detailed view of the drop compartment



Detailed view of the closed drop compartment

### Drop Safes Series HS 510

*The dropped contents fall to the bottom and can only be removed by authorized personnel.  
The deposit chute is secured with a lock.*

#### ■ Construction

- In line with security level A burglar protection according to VDMA 24992 05/95
- Double-walled door
- Door thickness 45 mm
- Fitted with front flap for cash strongboxes
- Drop-flap opening

#### HS 510-03:

Approx. 50 x 175 x 230 h x w x d in mm

#### HS 510-04:

Approx. 50 x 370 x 280 h x w x d in mm

- Fixture for floor and wall anchorage

#### ■ Configuration

- Lacquered finish RAL 7035 light grey
- DIN right-hinged door

#### ■ Lock

- Main door with double-bit security lock (includes 2 keys)
- Deposit flap with cylinder lock

#### ■ Option

- Electronic lock
- 2 mechanical double-bit security lock (4-eyes principle)



Drop Safe HS 510-03



HARTMANN *Locker Units*

*HARTMANN locker units are flexible: the number of compartments and their sizes, for example deposit slots or insert cassettes, are freely selectable. The units are also available in a representative stainless steel design – especially suited for any reception area.*

**Lock Units with stainless steel fronts**

*... a service that your guests are bound to value!*

**Construction**

- Every locker unit door has a thickness of 7mm. The door front is a finely polished stainless steel. The fine joints between the doors create a very elegant and structured all-over stainless steel look.
- Numbering: The finely imprinted compartment numbers create a rounded look.
- Cladding: The entire locker system can be clad in many different ways, for example in stainless steel, or with a standard lacquered finish or special lacquered finish.


Door fronts  
in polished  
stainless steel



**Locker Unit with stainless steel fronts**

**Possible locker unit dimensions**

Top and side panelling, height 20mm

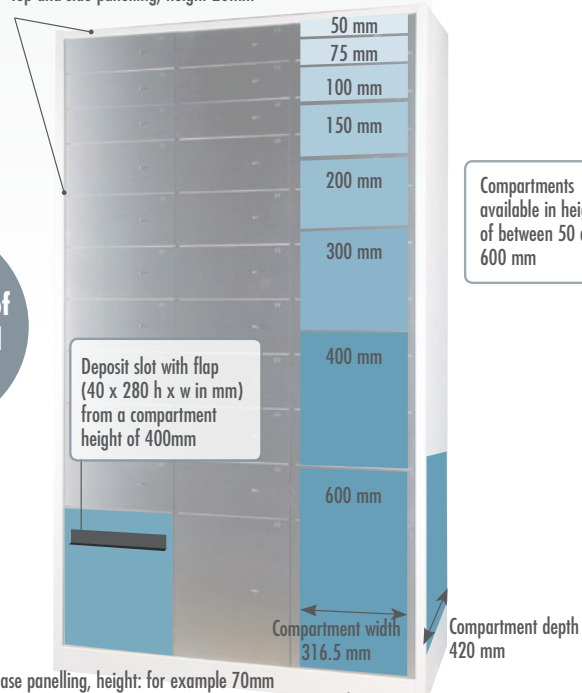


Compartments  
available in heights  
of between 50 and  
600 mm

Please ask us  
for a drawing of  
your individual  
configuration


Let us send you a non-binding offer.

Exterior dimensions, the number and size of compartments and the lock system can all be configured to suit your needs.

*with stainless steel finish*

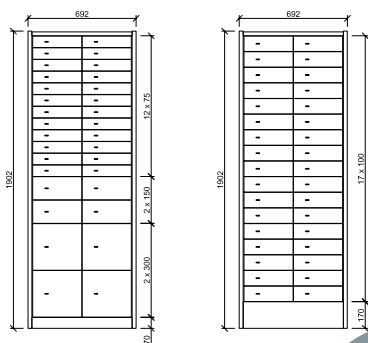


A-07366

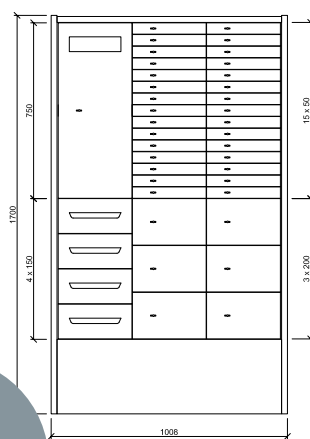


A-07825


Construction  
examples

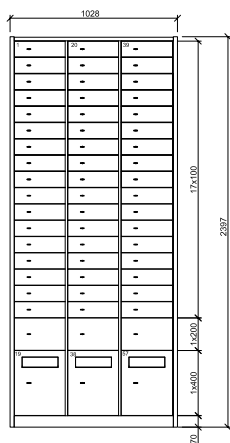


A-08355-A

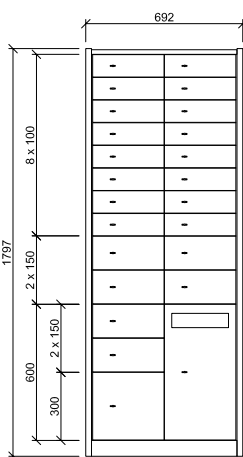

A-06849-B

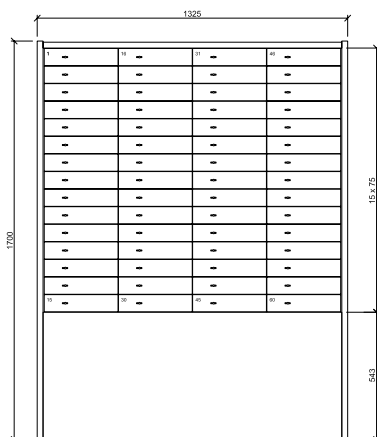

A-07400-A

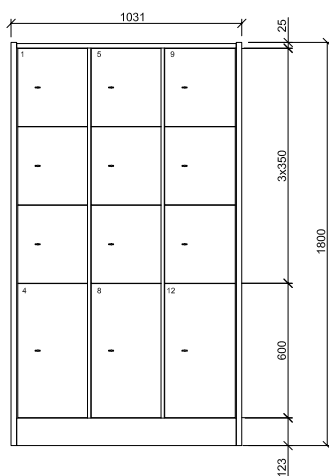

A-08533

#### Lock

- Hotel/bank lock with pre-lock and post-lock. Hotel lock: 2 keys; Guest lock system: each compartment with separate locking system with 2 keys per compartment. Hotel and guest locking system via a joint double-bit security lock.

#### Options

- Insert cassettes for every size of compartment up to a compartment height of 200 mm
- Sliding tray
- Deposit slot with flap available from a compartment height of 400 mm
- Side and top connecting panelling
- Stainless steel cladding
- Double-bit security lock
- Cylinder lock
- Special lacquered finish

Get your  
individual locker  
unit built!



Locker Units with stainless steel fronts



Security compartment module with insert cassette



Detailed picture of the stainless steel compartments

Door fronts  
in polished  
stainless  
steel

*with lacquered finish***Locker Unit***with a lacquered finish*■ **Construction**

- Locker unit with 20 compartments
- 16 compartments (2 side by side)  
Size: 100 x 500 x 450 mm h x w x d  
(door dimensions)
- Underneath: 4 compartments (2 side by side).  
Size: 200 x 500 x 450 mm  
h x w x d (door dimensions)
- Weight: approx. 300 kg

■ **Configuration/Functionality**

- Consecutive vertical numbering of all compartments from 1 to 20
- Compartment door pivot points: DIN right
- Colour: RAL 7035 light grey

■ **Lock**

- Hotel/bank lock with pre-lock and post-lock. Hotel lock: 2 keys; Guest lock system: each compartment with separate locking system with 2 keys per compartment. Hotel and guest locking system via a joint double-bit security.

**Locker Unit WTS 060-01**

One module comprises 7 locker units and one open compartment. The locker unit can be extended by 7 further compartments to 14, 21, 28 etc. The locker unit doors are equipped with double-bit security lock.

■ **Construction**

- Exterior dimensions per module:  
1700 x 315 x 233 mm h x w x d
- Interior dimensions:  
1680 x 300 x 220 mm h x w x d
- Locker unit compartment dimensions:  
200 x 290 x 170 mm h x w x d
- Door dimensions: 140 x 170 mm h x w
- Corpus and door 2 mm
- Anchorage is necessary due to top heaviness
- Weight: approx. 60 kg

■ **Configuration/Functionality**

- 7 locker unit compartments and one open compartment underneath
- Double-bit security lock, all individual locking
- Lacquered finish RAL 7035 light grey

**Example Locker Unit** *with a lacquered finish***Locker Unit WTS 060-01**



## HARTMANN Key Issuance Units

Offer your guests a 24-hour service without the reception having to be open. Guests that arrive out of normal opening hours can easily use the HARTMANN key issuance unit to obtain their room key. The units are suited for placement in a weatherproof area.



### Key Issuance System

Model HTS 315-01

#### ■ Construction

- Galvanised, powder coated steel plating
- 4-row display, 12-digit membrane keyboard
- Weather-proof façade mounting or mounting in entrance area of your building
- Issuance possibilities for 8 keys or cards, upgradeable to up to 15 keys
- Issuance of keys and key cards
- Tamper-proof issuance compartment
- Security door with 2-fold locking system

#### ■ Issuance Module



- Corpus 480 x 400 x 175 h x w x d in mm
- Weight: 17 kg

#### ■ Electronics

- Current 220-240V/50-60Hz
- Control unit: micro processor EEPROM
- Code memory function in case of power failure
- Traceability of number of openings
- Block function for unsuccessful attempts
- Alternating bilingual display
- Language selection: All major European Languages

#### ■ Finish

- RAL 9006 smooth finish

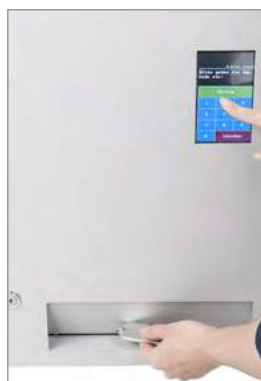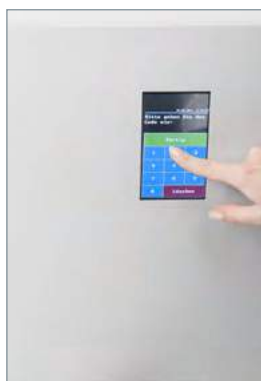

Key issuance system for guests arriving out of hours HTS 315-01



## HARTMANN Key Cabinets/Key Safes

HARTMANN key cabinets respectively key safes offer customised and perfect key management solutions. They are available in different security levels and with different equipment and furnishing options.

### Key Cabinets Series HTS 105

#### ■ Construction

- Single-walled door
- All round single-walled corpus
- Fixture for mounting to a wall

#### ■ Basic configuration

- DIN right-hinged door
- Adjustable hook rack, different colours, consecutively numbered
- Lacquered finish RAL 7035 light grey

#### ■ Lock

- Cylinder lock (incl. 2 keys)

### Key Cabinets Series HTS 107

#### ■ Construction

- Single-walled wing doors
- All-round single-walled corpus
- Flat front thanks to enclosed doors with all-round border
- Fixture for mounting to a wall

#### ■ Basic configuration

- Individually adjustable key racks
- Adjustable hook rack, different colours, consecutively numbered
- Lacquered finish RAL 7035 light grey

#### ■ Lock

- Cylinder lock (incl. 2 keys)

**Optional (HTS 105):**  
preparation for  
installation of a profile half  
cylinder lock for integration  
into existing locking  
systems



Key Cabinet HTS 105-06



Key Cabinet HTS 107-07



Key Cabinets Series HTS 105	Exterior dimensions h x w x d in mm	Weight in kg	No. hooks
HTS 105-01	350 x 270 x 80	3	21
HTS 105-02	350 x 270 x 80	3	42
HTS 105-03	450 x 300 x 80	4	32
HTS 105-04	450 x 300 x 80	4	64
HTS 105-05	550 x 380 x 80	5	50
HTS 105-06	550 x 380 x 80	6	100
Key Cabinets Series HTS 107	Exterior dimensions h x w x d in mm	Weight in kg	No. hooks
HTS 107-01	550 x 730 x 80	15	100
HTS 107-02	550 x 730 x 80	15	200
HTS 107-03	550 x 730 x 140	19	300
HTS 107-04	550 x 730 x 140	20	400
HTS 107-05	550 x 730 x 205	26	500
HTS 107-06	550 x 730 x 205	26	600
HTS 107-07	1300 x 730 x 250	59	780
HTS 107-08	1300 x 730 x 250	60	860
HTS 107-09	1300 x 730 x 250	60	940
HTS 107-10	1300 x 730 x 250	61	1020
HTS 107-11	1300 x 730 x 250	62	1170



Key Safe HTS 120-07



Key Safe HTS 114-02

Key Safes Series HTS 114	Exterior dimensions h x w x d in mm	Weight in kg	No. hooks	No. doors
HTS 114-01	436 x 460 x 120	22	70	1
HTS 114-02	636 x 460 x 120	34	100	1
HTS 114-03	636 x 460 x 200	47	150	1
HTS 114-04	636 x 460 x 200	48	200	1
HTS 114-05	636 x 460 x 300	53	300	1
HTS 114-06	636 x 812 x 200	75	400	2
HTS 114-07	636 x 812 x 300	86	600	2
Key Safes Series HTS 120	Exterior dimensions h x w x d in mm	Weight in kg	No. hooks	No. partition walls
HTS 120-01	600 x 500 x 500	200	320	4
HTS 120-02	800 x 500 x 500	200	400	4
HTS 120-03	600 x 636 x 500	300	600	6
HTS 120-04	800 x 636 x 500	300	980	7
HTS 120-05	1000 x 636 x 500	300	1400	7
HTS 120-07	1200 x 636 x 500	300	1960	7
HTS 120-08	1500 x 806 x 500	350	2560	8
HTS 120-10	1500 x 806 x 500	350	3200	10
HTS 120-12	1800 x 806 x 500	450	4000	10

**Key Safes Series HTS 114****Security level A**

according to VDMA 24992 05/95 and

**S1** according to EN 14450■ **Construction**

- Double-walled door 57 mm
- All-round single-walled corpus 3 mm
- Trilateral locking system
- Fixture for mounting to a wall

■ **Basic configuration**

- DIN right-hinged door -  
2 doors: DIN right and DIN left
- Individually adjustable hook racks in different colours, consecutively numbered
- Lacquered finish RAL 7035 light grey

■ **Lock**

- Double-bit security lock (incl. 2 keys)

**Key Safes Series HTS 120****Security level B**

according to VDMA 24992 05/95 and

**S2** according to EN 14450■ **Construction**

- Double-walled door 78 mm
- All-round double-walled corpus
- All-round fire fold
- Full pullout partition walls on telescopic runners

■ **Basic configuration**

- DIN right-hinged door
- Individually adjustable hook racks in different colours
- Lacquered finish RAL 7035 light grey

■ **Lock**

- Double-bit security lock (incl. 2 keys)

■ **Options**

- Also available with resistance grade I according to EN 1143-1
- Electronic lock





## HARTMANN *Back Office Safes*

*HARTMANN TRESORE's fire-resistant fortified safes for back office areas and offices are ideal for the secure storage of larger sums of cash and hotel files and documents – for example, personnel records, bookkeeping records and customer records. The safes are available in many different sizes and resistance grades. All safes are tested and certified in accordance to the European standard by neutral certification authorities.*

### Burglar-proof Safes

#### Series F 104

**Resistance grade I** according to EN 1143-1, VdS 2450

#### ■ Construction F 104 Series \*

- Extra strong construction method
- Door strength 80 mm, door panel strength 12 mm
- Door opening angle 90°
- Multi-walled sandwich construction method
- Multilateral bolt locking system, each bolt diameter 35 mm
- Fire-retardant insulation material DIN 4102
- All-round fire fold

#### ■ Basic Configuration

- DIN right-hinged door
- Ready for floor mounting
- Lacquered finish RAL 7035 light grey

#### ■ Lock

- Double bit security lock ( incl. 2 keys)



**Burglar-proof Safe F 104-04**

Additional sizes  
on request

Back Office Safes Series F 104	Ext. dimensions H x W x D (in mm)	Interior dimensions H x W x D (in mm)	Weight (in kg)	Volume (in litres)
<b>F 104-01</b>	425 x 516 x 430	325 x 400 x 295	93	38
<b>F 104-02</b>	506 x 516 x 430	406 x 400 x 295	99	48
<b>F 104-03</b>	606 x 516 x 430	506 x 400 x 295	118	60
<b>F 104-04</b>	706 x 516 x 430	606 x 400 x 295	137	72
<b>F 104-05</b>	806 x 516 x 430	706 x 400 x 295	156	83



Burglar-proof Safe HPI 1000-05

Burglar-proof Safe HPI 1000-07

**Burglar-proof Safes**

Series HPI 1000

**Resistance grade I**

Burglar protection according to EN 1143-1,  
HARTMANN TRESORE ECB-S product certificate

■ **Construction**

- Multi-walled corpus and door
- Solid door, door thickness 124 mm
- Door opening angle 180°
- Special door seal tape prevents the infiltration of fire gases
- DIN right-hinged door

■ **Basic configuration**

- DIN right hinged door
- Height adjustable shelves (see table)
- Fixture for floor and back wall anchorage
- RAL 7024 graphite grey

■ **Lock**

- Double-bit security lock (incl. 2 keys)

■ **Options**

- Electronic keypad lock
- Biometric fingerprint locking system
- Also available in heavy-duty type with special concrete filling (series HPIB 1000)

**NEW**

- innovative
- secure
- convenient

**Safes with VdS-approved  
Finger Locking System!**

Burglar-proof Safes Series HPI 1000	Ext. dimensions H x W x D (in mm)	Interior dimensions H x W x D (in mm)	Weight (in kg)	Volume (in litres)	No. shelves	No. folder
HPI 1000-01	450 x 500 x 500	350 x 390 x 340	110	46	1	5
HPI 1000-02	800 x 600 x 500	700 x 490 x 340	200	117	2	12
HPI 1000-03	1000 x 600 x 500	900 x 490 x 340	219	150	2	14
HPI 1000-04	1200 x 600 x 500	1100 x 490 x 340	252	183	3	18
HPI 1000-05	1200 x 705 x 500	1100 x 595 x 340	300	223	3	21
HPI 1000-06	1500 x 705 x 500	1400 x 595 x 340	335	283	4	28
HPI 1000-07	1830 x 705 x 500	1730 x 595 x 340	396	350	4	35
HPI 1000-08	1500 x 1000 x 500	1400 x 890 x 340	413	424	4	44
HPI 1000-09	1830 x 1000 x 500	1730 x 890 x 340	493	523	4	55



## Data Media Safes

We offer special data media safes for the secure storage of electronical data carriers. Sensitive data carriers can be protected optimally from fire, smoke and extinguishing water thanks to the safes' special fillings and seals.

### ■ Construction HTFA 080 Series

#### Security class A

according to VDMA 24992 dated 05/95 and

**S2** according to EN 14450

#### Quality grade S 60 DIS

Fire proof according to EN 1047-1

- Door strength 151 mm
- Multi-walled corpus and door
- All-round bolt locking system
- High-quality fire-proof insulation of the safe corpus
- Door and corpus filled with high-quality fire-proof insulation
- Base height 85 mm
- Extendable drawers
- Vertically extending door

### ■ Construction HTFI 190 Series

#### Resistance grade I

according to EN 1143-1

#### Quality grade S 120 DIS

Fire proof according to EN 1047-1

- Overall door strength 173 mm
- Multi-walled corpus and door
- All-round bolt locking system
- Door opening angle 180°
- Height-adjustable compartment shelves
- DIN right-hinged door

### ■ Basic Configuration

- Ready for floor mounting
- Lacquered finish RAL 7035 light grey

### ■ Lock

- Double bit security lock ( incl. 2 keys)

**Fire protection  
60 minutes**



Data Media Safes HTFA 080-02

Also available in  
resistance grade I  
according to  
EN 1143-1

Image with optional features



**Fire protection  
120 minutes**

Data Media Safes HTFI 190-03

Also available in  
resistance grade II  
according to  
EN 1143-1

Data Media Safes Series HTFA 080	Exterior dimensions h x w x d in mm	Interior dimensions h x w x d in mm	Weight in kg	Volume in litres
HTFA 080-01	635 x 540 x 630	400 x 380 x 397	200	60
HTFA 080-02	635 x 540 x 755	400 x 380 x 522	225	79
Data Media Safes Series HTFI 190	Exterior dimensions h x w x d in mm	Interior dimensions h x w x d in mm	Weight in kg	Volume in litres
HTFI 190-01	1143 x 714 x 662	887 x 493 x 388	433	170
HTFI 190-02	1143 x 800 x 730	887 x 579 x 456	501	234
HTFI 190-03	1300 x 800 x 730	1044 x 579 x 456	560	276
HTFI 190-04	1456 x 886 x 798	1200 x 665 x 524	707	418





## **Austria**

Austria Trend Hotel Doppio, Wien  
 Sporthotel Steffisalp, Warth am Arlberg  
 Courtyard by Marriott, Unterpremstätten  
 Hilton Vienna Danube Hotel  
 Landhotel Moorhof, Franking  
 Hotel Panorama, Gerlos  
 Grand SPA Resort A-ROSA Kitzbühel  
 Parkhotel Schönbrunn Wien  
 Austria Trend Hotel Doischberg, Fieberbrunn  
 Clubhotel Funimation, Rennweg am Katschberg  
 Aldiana Clubhotel Bad Mitterndorf  
 Courtyard by Marriott Vienna Messe  
 Hotel "Der Steirerhof", Bad Waltersdorf  
 Hotel Schloss Lehenberg, Kitzbühel  
 Klosterneuburg Sport & Conference Hotel, Fehring  
 Landhaus Strolz, St. Anton am Arlberg  
 Hotel am Schottenfeld, Wien  
 Falkensteiner Hotel & Spa Bad Leonfelden, Wien  
 Arcotel Hotels & Resorts GmbH, Wien  
 Lindner Seepark Hotel Congress & Spa, Klagenfurt  
 Crowne Plaza, Salzburg  
 Bad Gleichenberg Thermen- und Therapie GmbH  
 Grand Hotel Lienz  
 Park Inn Klosterneuburg  
 Park Inn Linz  
 Steigenberger Wien  
 Grand Tirolia Resort Kitzbühel  
 Hotel Daniel, Wien  
 25hours Hotel, Wien  
 Seehotel Kaiserstrand, Lochau  
 Hotel Doischberg Fieberbrunn  
 Hotel Explorer Gaschurn  
 MEININGER Hotels  
 Travel Charme Kleinwalsertal Hirschegg

## **Switzerland**

Best Western Hotel Stüchi, Basel  
 Hotel Banana City, Winterthur  
 Lindner Hotel Interlaken AG Beau Rivage  
 Hotel Simi, Zermatt  
 Hotel Matthiole, Zermatt  
 Radisson SAS, Luzern  
 Courtyard by Marriott, Zürich  
 Radisson Blu Hotel Zurich Airport

St. Moritz - Giardino Mountain  
 Renaissance Zürich Tower Hotel

## **Belgium**

Radisson SAS EU Hotel, Brüssel  
 Nexity I.G. SA, Brüssel  
 Manoir de Lébioles, Spa  
 Kempinski Hotel Duke's Palace, Brügge

## **France**

Radisson SAS Hotel Boulogne, Paris  
 Renaissance Hotel Paris Vendome  
 Radisson-Golf Hotel, Disneyland, Paris  
 Courtyard by Marriott Paris St. Denis  
 Radisson SAS Aix les Bains  
 Mövenpick Dream Castle Hotel, Paris  
 Courtyard by Marriott Toulouse Airport  
 Radisson SAS Hotel Toulouse Airport, Blagnac  
 Radisson SAS Grand Hotel de Bordeaux  
 Courtyard by Marriott Paris Defense West, Colombes  
 Renaissance Paris Arc de Triomphe Hotel

## **Great Britain**

Marriott Hotel, Grosvenor Square, London  
 Radisson SAS Hotel, London  
 Park Inn Hotel, Manchester  
 Hotel Missoni Edinburgh  
 West India Quay Development, London  
 West India Quay Marriott, London  
 Park Inn Palace, Southend-on-Sea  
 Courtyard by Marriott Gatwick Airport  
 Radisson Blu Waterfront Hotel, Jersey  
 London Marriott Hotel Twickenham

## **Poland**

Courtyard by Marriott, Warschau  
 Hotel Holiday Inn, Warschau  
 Hotel Radisson SAS, Warschau  
 Hotel Radisson SAS, Krakau  
 Hotel Sheraton, Krakau  
 Golf Valley Country Club Hotel, Paczółtowice  
 Grand Hotel Lublinianka, Lublin

## **Spain**

Marriotts Marbella Beach Resort, Marbella

Marriotts Playa Andaluza, Estepona  
 Mallorca Marriott Son Antem Golf Resort & Spa

## **Czech Republic**

Mandarin Oriental, Prag  
 Courtyard by Marriott, Prag  
 Orco Property, Prag  
 Kempinski Hybernaska Prague  
 Courtyard by Marriott Pilsen  
 Express by Holiday Inn  
 Courtyard by Marriott Airport, Prag

## **United Arab Emirates**

Citymax Hotel Dubai  
 Landmark Hotels & Suites Dubai  
 Le Meridien Fujairah  
 Sharjah Palace Hotel Sharjah  
 Sheraton Dubai Creek Hotel & Towers  
 Sheraton Jumeirah Beach Resort

Radisson SAS Espoo (Finnland)  
 Best Western Hotel International (Luxemburg)  
 Radisson SAS Iveria Hotel, Tifli (Georgien)  
 Radisson SAS Roma (Italien)  
 Terme Meran AG (Italien)  
 Radisson SAS Hotel Fredrikstad (Norwegen)  
 Hotel Danube, Bratislava (Slowakei)  
 Kempinski Palace, Dschibuti (Dschibuti)  
 Double W Kiev Ltd, Kiew (Ukraine)  
 Renaissance Aktau Hotel (Kasachstan)  
 Radisson SAS Hotel Astana (Kasachstan)

## **HARTMANN TRESORE AG**

### **-HEAD OFFICE-**

Pamplonastraße 2  
D-33106 Paderborn  
Germany

Telephone +49 (0) 5251 1744 -0

Fax +49 (0) 5251 1744 -999

---

**[www.hartmann-tresore.com](http://www.hartmann-tresore.com)**

**[info@hartmann-tresore.com](mailto:info@hartmann-tresore.com)**

